


Theatre Royal, Dumfries, Main Auditorium Technical Plan V1 - SS - 09/16

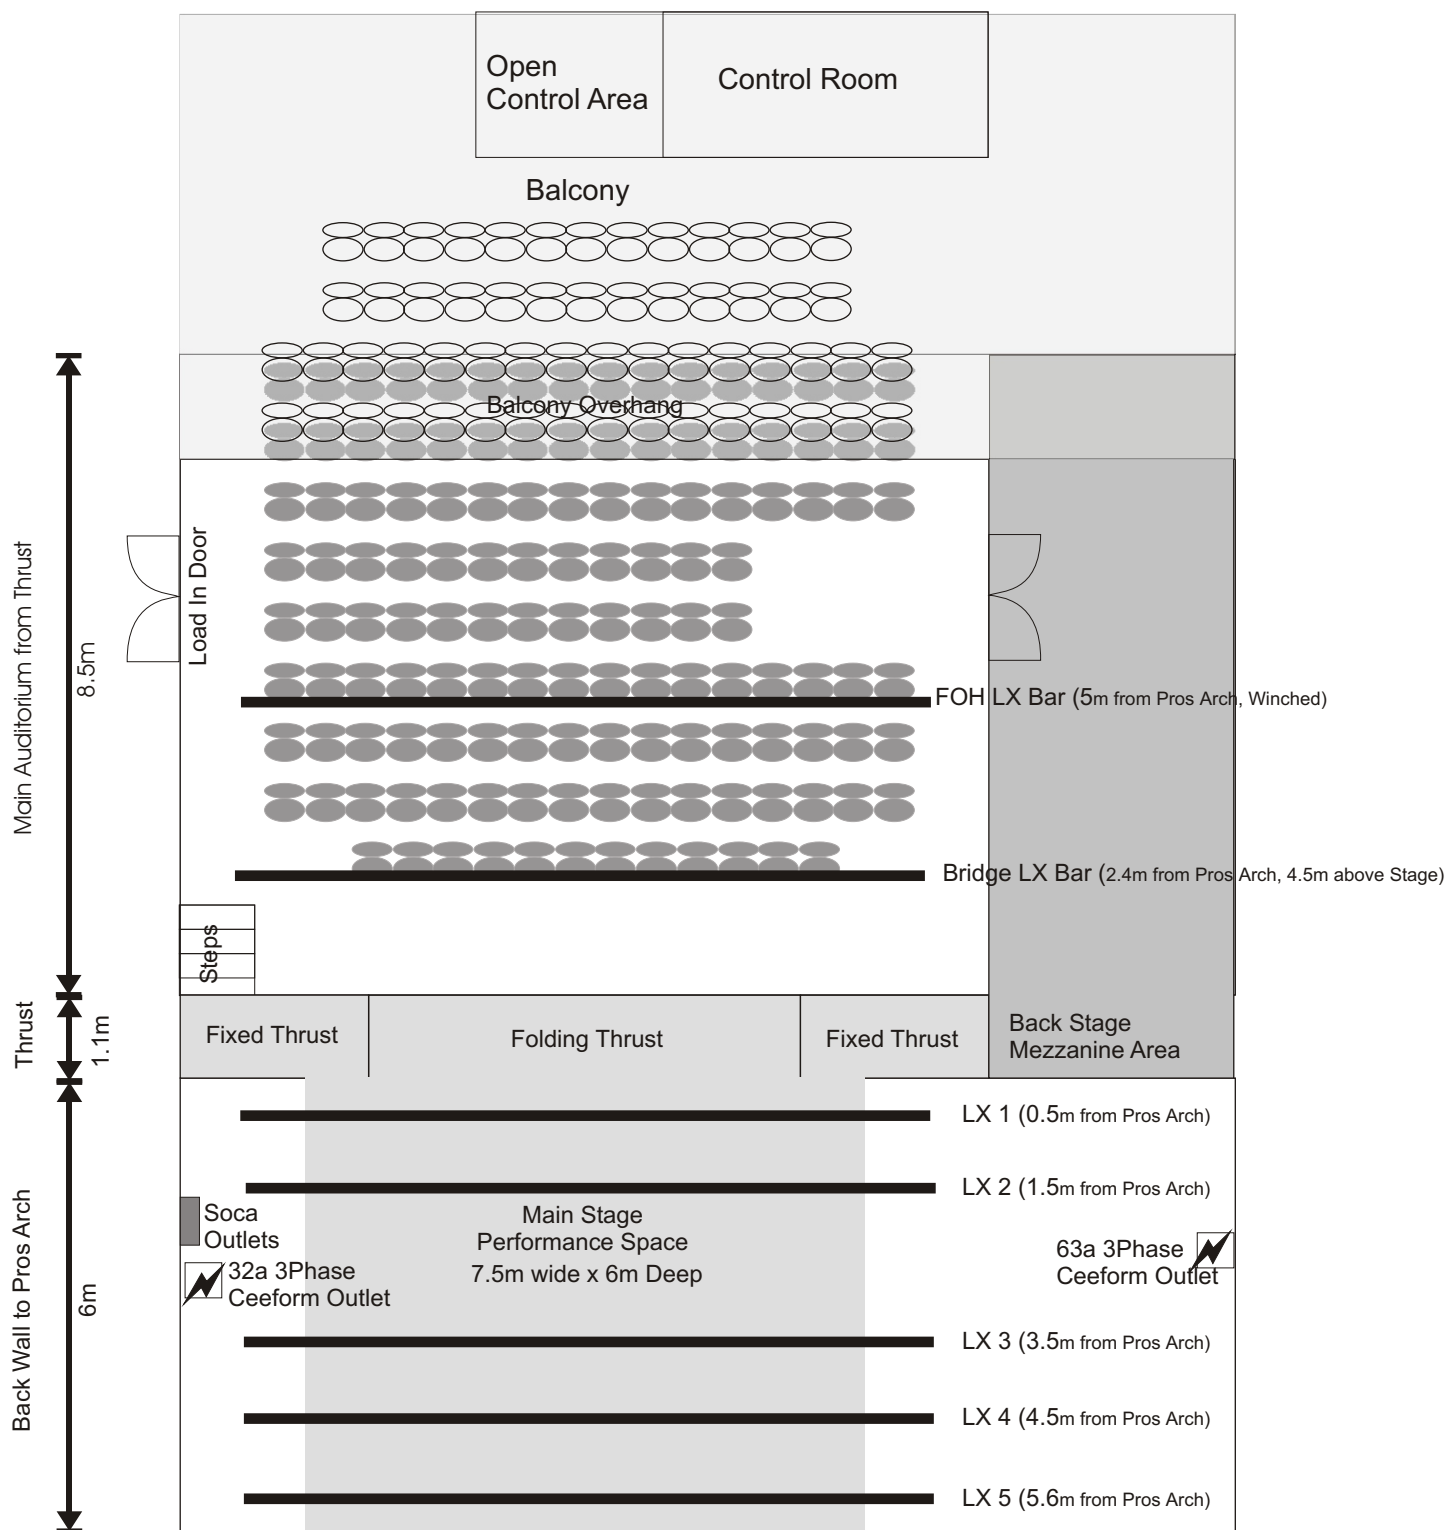

Theatre Royal, 58-70 Shakespeare Street, Dumfries, DG1 2JH

Telephone - 01387 254209

Technical Manager - Ross Nurney - 07704545115

Capacity 190 - (Main Auditorium - 132 & Balcony - 58) All Seated.

Load In - One step up from pavement level from Queen Street.

Parking - Street parking for unload - Large free carpark within 50 yds

PA & LX - In House - Please see attached dimmer plots & inventory for specs

Grid Height - 5m Approx from Stage

LX Bar Height - 4.5m from Stage

Performance Area - 7.5m x 6m

Stage - Proscenium Arch Stage - NOT RAKED


Stage Height - 1.63m

Main Front Tabs - Manually Op'd from Stage Right

Main Auditorium Dimmer Plot 2016


FOH Advanced Bar - Winched

(sharing channels 7 - 12 with Bridge)




Bridge/Gantry

(sharing channels 7 - 12 with FOH Bar & 67 - 72 on Soca from Stage)





Boom SL

(sharing channels 55 & 56)



Boom SR

(sharing channels 55 & 56)

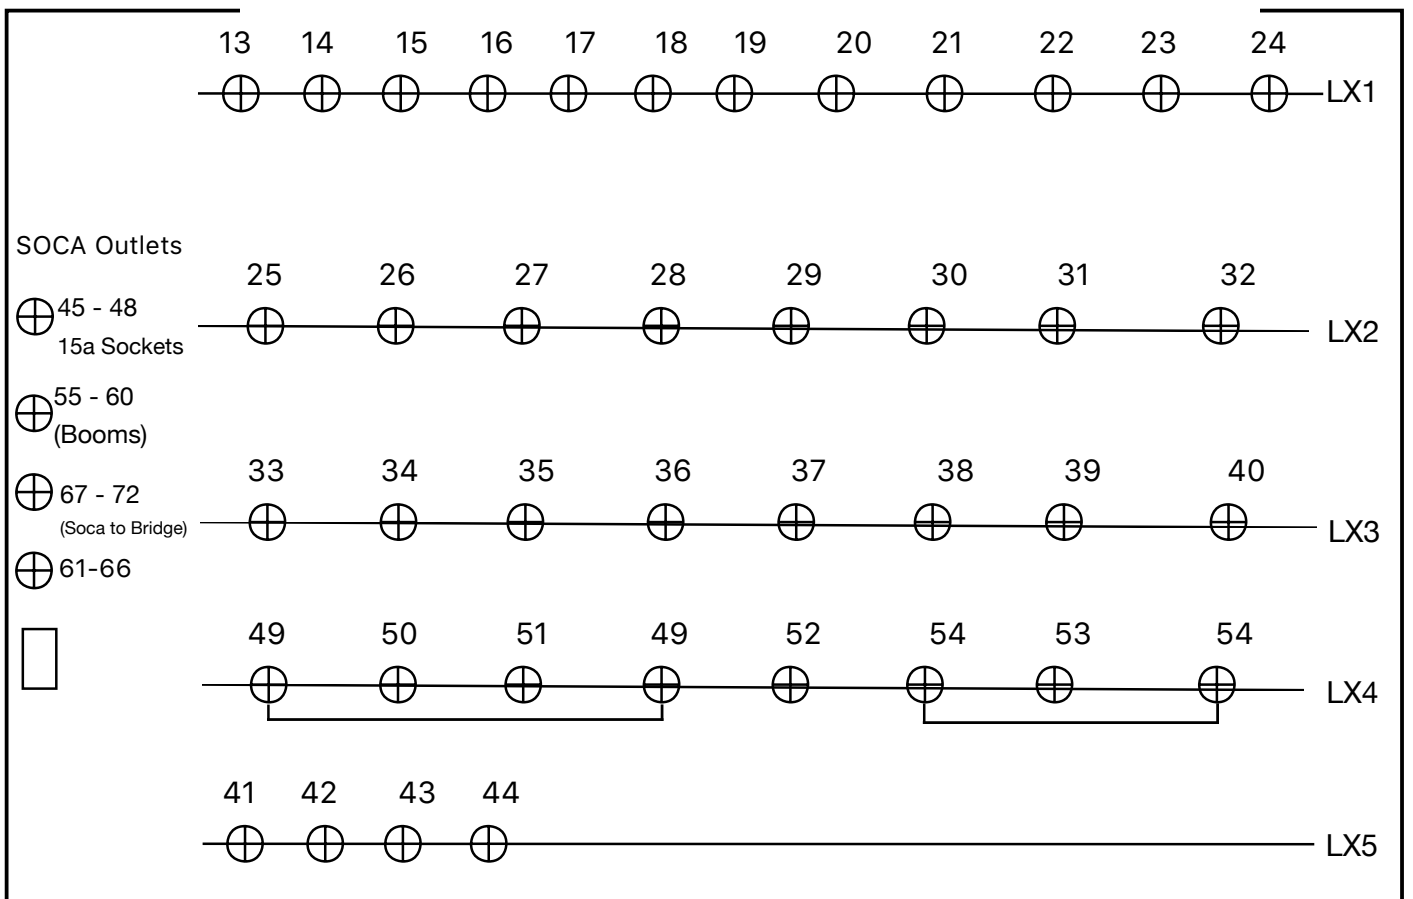

House Lights - DMX Line B - 505 - 510

Theatre Royal, Dumfries

Stock - 29/07/2016

Completed By S Sweetman

Fixtures	Qty	Comments	Date Tested
Coda 4 Way Floods (Cyc)	4		
Coda 500/1 Floods	2		
ETC Source 4 Junior	10		
Harmony 15/28	10		
Harmony 22/40	3		
Harmony PC	8	5 require Barndoors	
Patt 123	10	Condition Unknown	
Patt 23	6	Condition Unknown	
Prelude 16/30	3		
Prelude 16/30 w/ Moving Yolk	2	Yolks need tested	
Prelude 18/20	1		
Prelude F	4		
Quartet F	2		
Quartet PC	7		
Selecon Acclaim Fresnel 650	19	10 require barn doors	
Strand Solo 2k Follow Spot	1		
Strand T84	1		
Thomas Long Nose Par 64 Black	8		
Short Nose Par 64 Floor Black	10	SW Audio	

Item	Qty	Comments	Date Tested
Zero 88 Leap Frog 48	1	Main Auditorium	
ETC Smartfade 1248	1	Studio	
Starcloth DMX 8m x 4.5m	1	Prolight Star 06	
Strand Floor Stand	6		
Stage Weights	20		
Zarge Ladders 4.1m	1		
Mirror Ball with motor	1	To be tested	
Martin Junior 700 Smoke Machine	1	To be tested	
Grelcos		Purchased July 2016	
Wire Safety Bonds		Purchased July 2016	
Clamps		Purchased July 2016	
Steel Deck 2m x 1m Carpeted Black	2	300mm Legs (SW Audio)	
White Natural Muslin Cyclorama	1	Main Stage	

Audio	Qty	Comments	Date Tested
Mackie VLZ 24/4/2 Analogue Mixer	1	Main Auditorium	
QSC CXD 4.3 Amplifier	2	1 Main FOH - 1 Balcony	
QSC GX3 Amplifier	1	Stage Foldback	
QSC ADS8-T Speaker	4	2 Main Auditorium - 2 Balcony	
QSC ADS4-T Speaker	2	Front Fills	
QSC ADS112SW Sub Speaker	2	FOH Sub	
24/4 Soundlab Analogue Multicore	1	Control Room to Stage Left	
Wharfedale Pro EV-X15M Wedge Monitor	2	Passive	
Wharfedale Pro EV-X15 Full Range Speaker	2	Passive	
Straight Mic Stand	1		
Boom Mic Stand	1		
Speakon Splitter	1	Purchased 08/16	
Bechstein Baby Grand Piano	1		
XLR Cables 10m (Black)	10	Purchased 08/16	
XLR Cables 6m (Black)	10	Purchased 08/16	
Extension Cables Black 2G 3M	5	Purchased 08/16	
Extension Cables Black 2G 5M	5	Purchased 08/16	

Audio	Qty	Comments	Date Tested
Extension Cables Black 4G 10M	5	Purchased 08/16	